



SRK 250 RR



ABS
Anti-Lock Braking System

FULL THROTTLE AT ONCE

SRK 250 RR



TECHNICAL SPECIFICATION

ENGINE TYPE	2-CYLINDER INLINE, 4-STROKE, 8 VALVES, DOHC
BORE X STROKE (MM)	61 X 42.7
COMPRESSION RATIO	12:1
DISPLACEMENT (CC)	249
COOLING SYSTEM	LIQUID-COOLED
LUBRICATION SYSTEM	FORCE & SPLASH
MAXIMUM POWER	25HP AT 8,500RPM
MAXIMUM TORQUE	24.1NM AT 6,500RPM
CLUTCH TYPE	WET MULTIPLATE WITH ASC
FUEL SYSTEM	ELECTRONIC FUEL INJECTION
STARTER	ELECTRIC
TRANSMISSION	CHAIN, 6-SPEED
FRONT SUSPENSION	UPSIDE DOWN TELESCOPIC FORKS
REAR SUSPENSION	MONOSHOCK
FRONT BRAKE	SINGLE DISC 300MM, ABS
REAR BRAKE	SINGLE DISC 240MM, ABS
FRONT TYRE	110/70-17
REAR TYRE	140/70-17
OVERALL LENGTH (MM)	2,050
OVERALL WIDTH (MM)	785
OVERALL HEIGHT (MM)	1,130
SEAT HEIGHT (MM)	780
WHEELBASE (MM)	1,420
GROUND CLEARANCE (MM)	140
WEIGHT (KG)	175
FUEL CAPACITY (L)	14
BATTERY	12V8AH

*All figures and specifications are subject to change without prior notice.

ERGONOMIC RIDING POSITION
Comfort goes beyond keeping the body in a perfect posture for optimal riding

FUEL TANK 14-LITER
Extra mileage for extra journey

LCD SCREEN PANEL
Provide complete information for rider

FULL LED HEADLIGHTS
Stunning style and brilliant night-time vision

UPSIDE DOWN TELESCOPIC FORKS
Provides incredible road feel and decent handling

FRONT DISC BRAKE + ABS
Single Disc 300mm with Anti-lock Braking System (ABS)


**ENGINE 249CC,
2-CYLINDER INLINE, DOHC**
Can produce maximum power 25Hp at 8,500rpm and maximum torque 24.1Nm at 6,500rpm

REAR SUSPENSION
Offers more stability at higher speeds or while cornering

ALUMINIUM ALLOY SWINGARM
Allowing it to pivot vertically

REAR DISC BRAKE + ABS
Single Disc 240mm with Anti-lock Braking System (ABS)

LED TAIL LIGHTS
Make you more visible to traffic

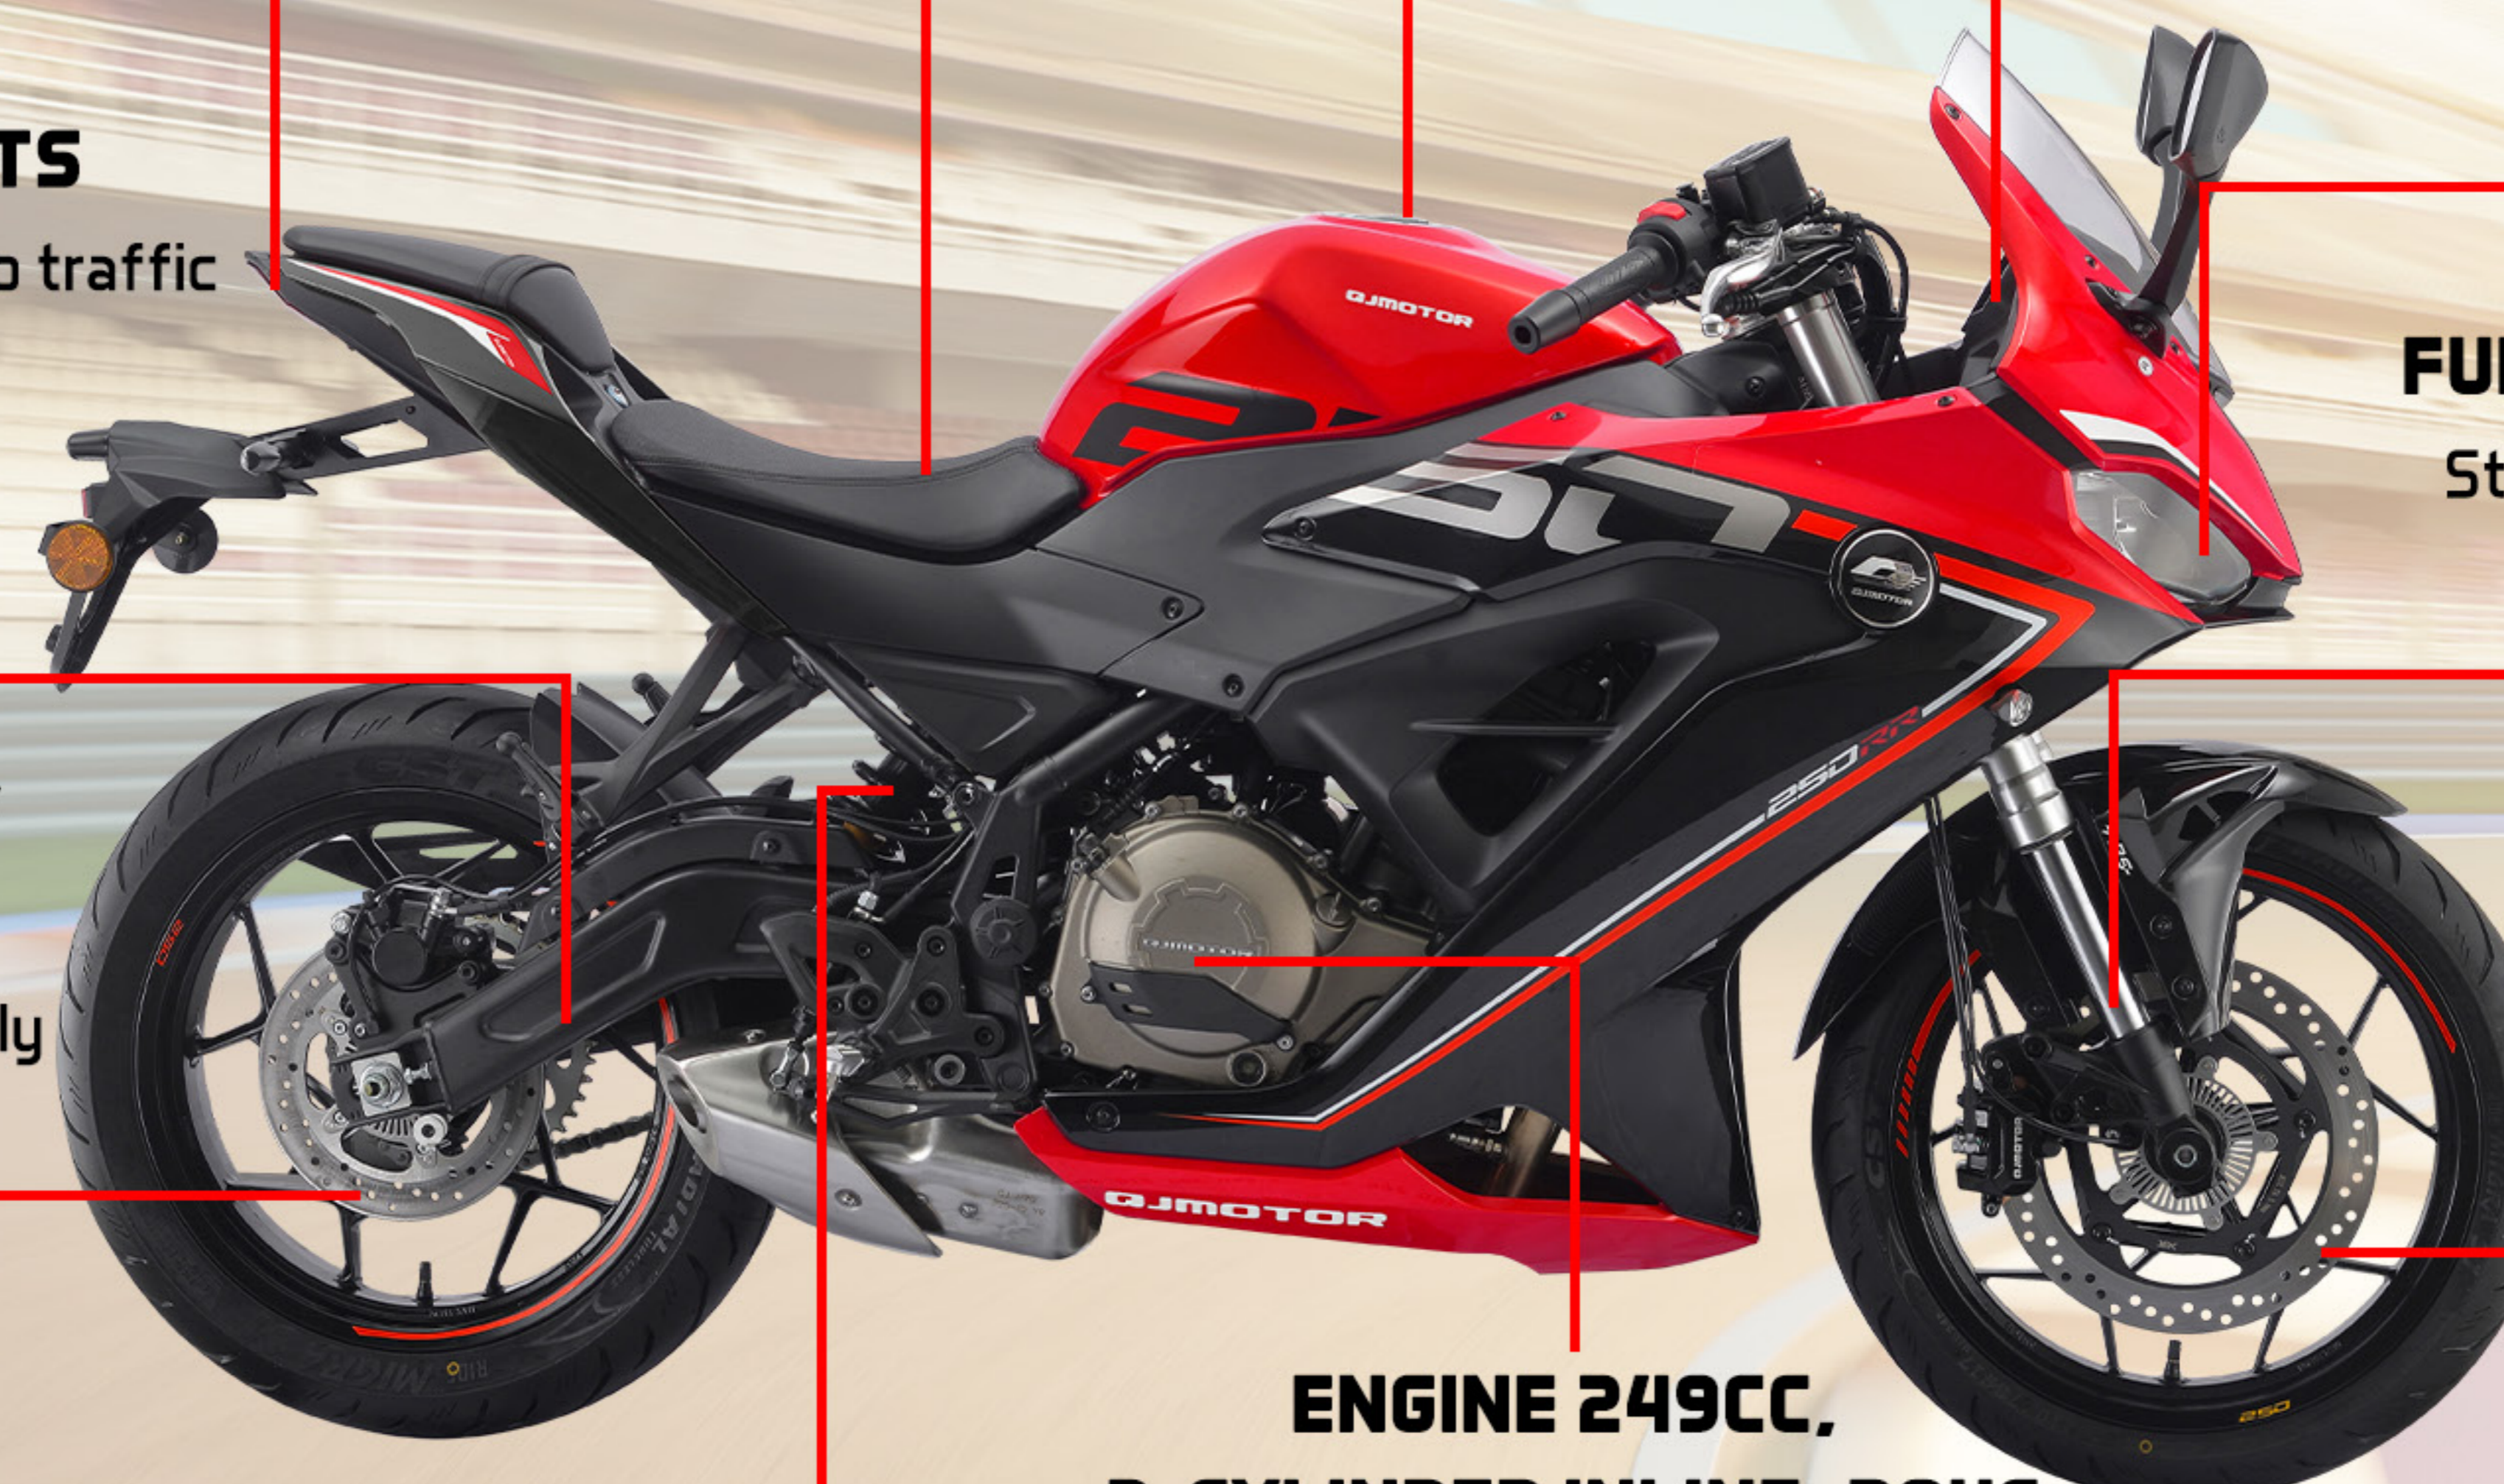

COLOUR OPTIONS



Distributed by



MFORCE BIKE HOLDINGS SDN. BHD.(751410-H)
1485, Jalan Seruling, Kawasan Perindustrian Valdor, 14200 Sungai Jawi, Pulau Pinang, Malaysia.
Tel: 604-545 2222 | Fax: 604-545 2288 | Email: help@mforce.my